



Flexi-Power

User manual


EN

Use

Suitable for outdoor use in the garden. Not suitable for use on construction sites or in other harsh industrial environments.


Installation

Securely screw the ground stake into the bottom of the Flexi-Power. Ensure that a drip loop is formed in the power cord to prevent water from running along the cable into the socket or power adapter.

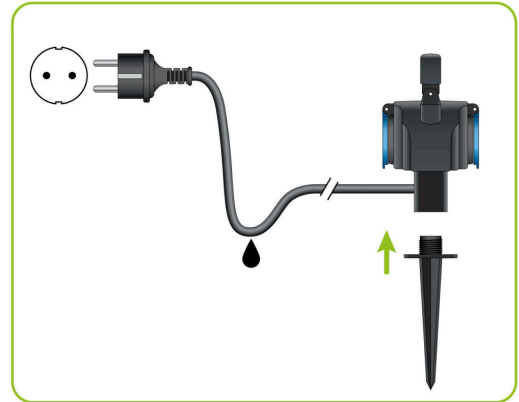


Positioning the Flexi-Power

The Flexi-Power must be placed at least 50 cm away from the pond in a location where no (rain)water can accumulate (do not place it in a depression or hollow).


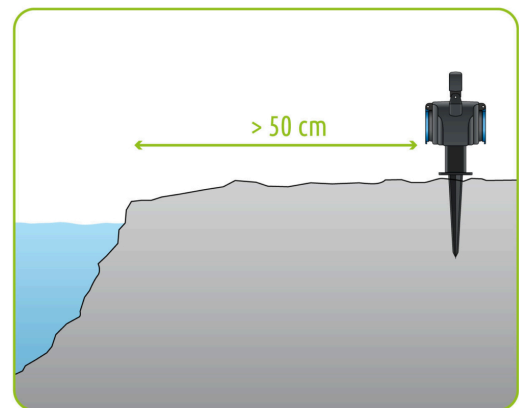


Do not place the Flexi-Power near heat sources or in direct sunlight.

The Flexi-Power must be installed vertically with the ground stake firmly inserted into the ground.

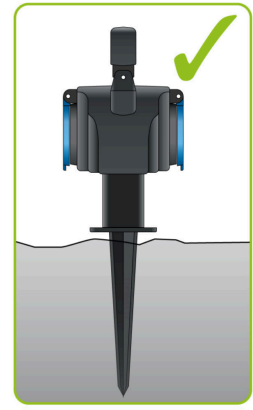

Ensure that all cables connected to the Flexi-Power run downward from the sockets so that water cannot travel along the cables into the outlets.

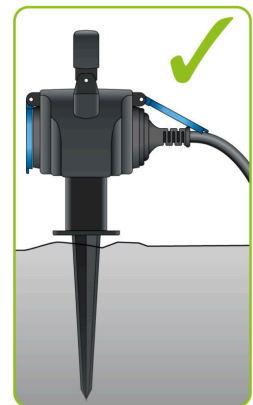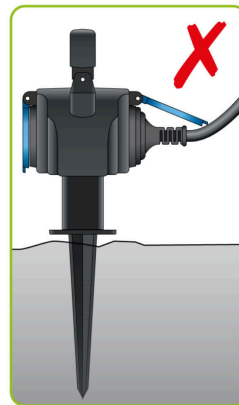

Safety & Warranty

[View the Safety & Warranty »](#)