




Surface Skimmer 300

User manual

EN


Function

Dirt, fats, proteins and micro-organisms form an oily film at the surface of the aquarium. With the Surface Skimmer this dirt is continuously extracted, so that the water surface remains clean and clear. This ensures a better oxygen exchange at the water surface and the light can penetrate deeper into the aquarium.

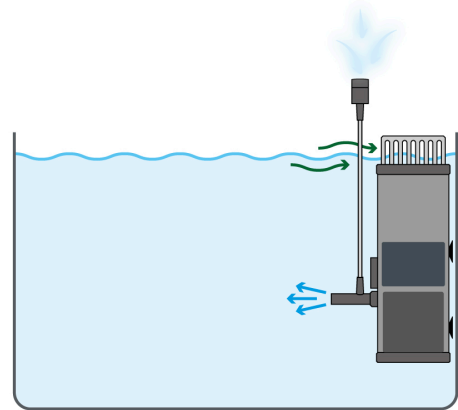


Installation


- Rinse the skimmer housing and sponge with clean tap water before installing it in the aquarium.
- Install the skimmer without the float, 2 to 3 cm below the water surface in the aquarium. Attach the skimmer firmly to the wall of the aquarium with the suction cups.
- Place the float and operate the skimmer by plugging the plug into a mains socket.

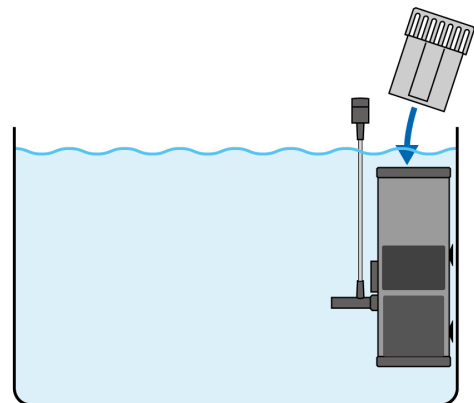

The height of the float can be adjusted by turning the knob.

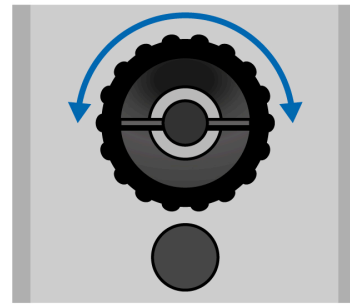

Adjust the water flow with the air valve. Make sure the air valve is above the water so that the pump can suck air.

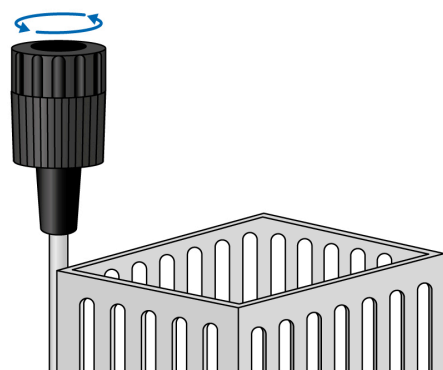

Overview

- a** – Flow adjust
- b** – Float
- c** – Sponge
- d** – Float height
- e** – Outlet
- f** – Suction cups
- g** – Pump



Safety & Warranty

[View the Safety & Warranty »](#)